

Gigabit Ethernet, Voice and Data Multiplexer

Product Overview

The VCL-MX-IP, Gigabit Ethernet, Voice & Data Multiplexer may be used to provide legacy Voice, Data and C37.94 Teleprotection Channels over Gigabit Ethernet / IP / MPLS networks with Stratum level timing precision. The VCL-MX-IP uses IEEE-1588v2 PTP synchronization technology to provide time-of-day and frequency synchronization to a single central GPS source with 0.5 micro-second (500 nanosecond) accuracy.



Features and Highlights

- Gigabit Ethernet, Voice & Data Multiplexer
- Uses E1 over Packet / TDM over IP / E1 over Ethernet / technology to transport legacy Voice, Data, IRIG-B Time Code and Teleprotection Channels over Gigabit Ethernet / IP links.
- <2ms latency for E1 / T1 transmission.
- Delivers error free transmission of E1, 2-wire and 4-wire Voice, Synchronous and Asynchronous Data, C37.94 Teleprotection and IRIG-B time over Ethernet / IP / MPLS networks with Stratum 1 (GPS Synchronized) or Stratum 3E level of accuracy.
- Integrated IEEE C37.94 Teleprotection Interfaces.
- Integrated, 4 x IRIG-B interfaces for RTU time-of-day synchronization to a single central GPS source with 0.5 micro-second (500 nanosecond) accuracy.
- Uses IEEE-1588v2 PTP synchronization technology.
- 2.048 MBits and Phase-Locked 2.048 MHz Frequency Outputs for accurate synchronization clock distribution.
- Suitable for Smart Grid applications.
- Multiple user side Fast Ethernet, Power over Ethernet (PoE) and Gigabit Ethernet Port options for audio or video conferencing applications.
- 1+1 Network Link Protection / Network Port Redundancy on both 'East' and 'West' side.
- The transmission medium can be either of the following:
 - Optical Fiber (1000Base-LX or 1000Base-FX Optical Gigabit)
 - Copper (10/100/1000BaseT Ethernet)
 - Wireless (Ethernet / IP Radios).

Power Supply Options

- Dual Redundant Power Supply Options
- 1+1 DC (-48V) power (40 to 72V DC).
- 1+1 DC 110-125V power (90 to 135V DC) - Using external DC-DC Converter.
- 1+1 AC power (100 to 240V AC, 50/60 Hz) - Using external AC-DC Converter.
- EMI/EMC compliant.

Network and User Interfaces

Uplink Network Interface (Any 4 user selectable ports)

- 4x10/100/1000BaseT
- 4x1000Base SX / LX

User Side Interface

- 4x10/100BaseT Ethernet Ports plus 4x10/100BaseT PoE (Power over Ethernet) Ports
- 8x 100BaseFX Optical Ethernet Ports (SFP)
- 8x E1/T1 Interface
- 4x IRIG-B outputs

Voice Interface

- FXO, FXS, E&M (2-Wire and 4- Wire), FXS-FXS.
- Hot-line, Ring Generator (75V RMS).

Data Interface

- Synchronous: G.703 / V.35 / V.36 / X.21 / RS530 / V.24 / V.11 / V.28.
- Asynchronous: RS232 / RS485 / V.24 / RS422 / V.28
- Other: Relay I/O (Dry Contact)

Teleprotection: C37.94 Interface.

Synchronization

- IEEE-1588v2 Frequency and Time-of-Day synchronization.
- IEEE-1588 Clock synchronization to a GPS clock source, or within the network in a Master / Slave mode, Internal Clock, External 2.048 Mbits Clock (120 Ohms Bits clock).
- User Selectable PTP IEEE-1588v2, Internal, Adaptive, Loop-Timed and External clock synchronization. User defined clock priority options.

Management Features


- RS232 serial console port,
- USB console port.
- In-band Ethernet (Telnet, SSH and TFTP) management.
- Automatic updating of RTC (Real Time Clock) time - RTC shall update itself at user defined intervals from a GPS PTP Grandmaster or from an NTP Server (the user shall define the IP address of the NTP server).
- Supports command line interface with predictive command completion.
- Supports IEEE802.1x security,
- Password Protection.
- SNMP V2 Traps.

External Alarms


- Dry Contact Relay.

Application Diagrams


In an IP/Ethernet / MPLS Network

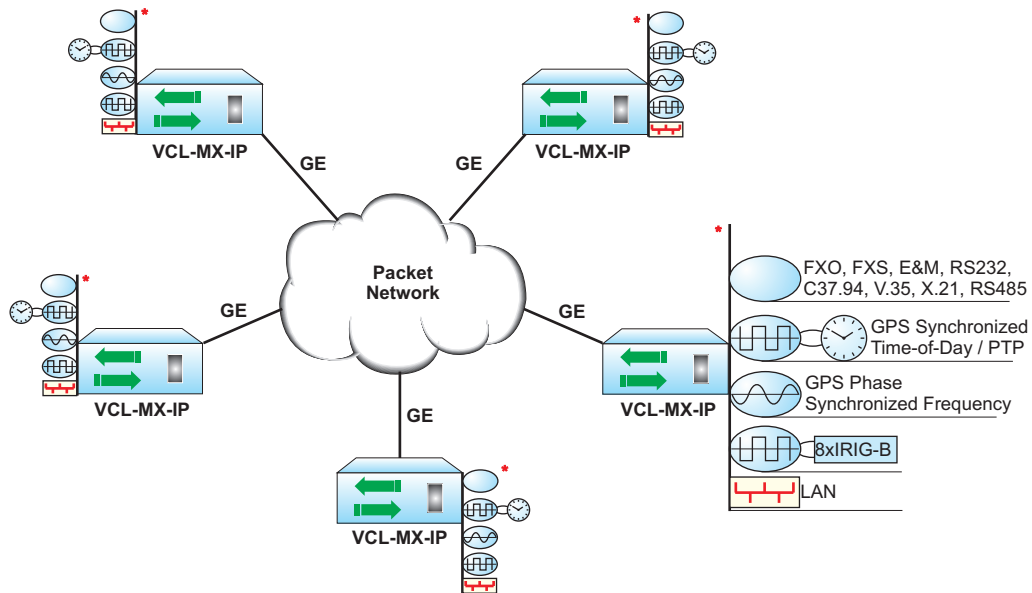

In a 1+1 Self-Healing Optical Fiber Ring (Rapid Spanning Tree Protocol)

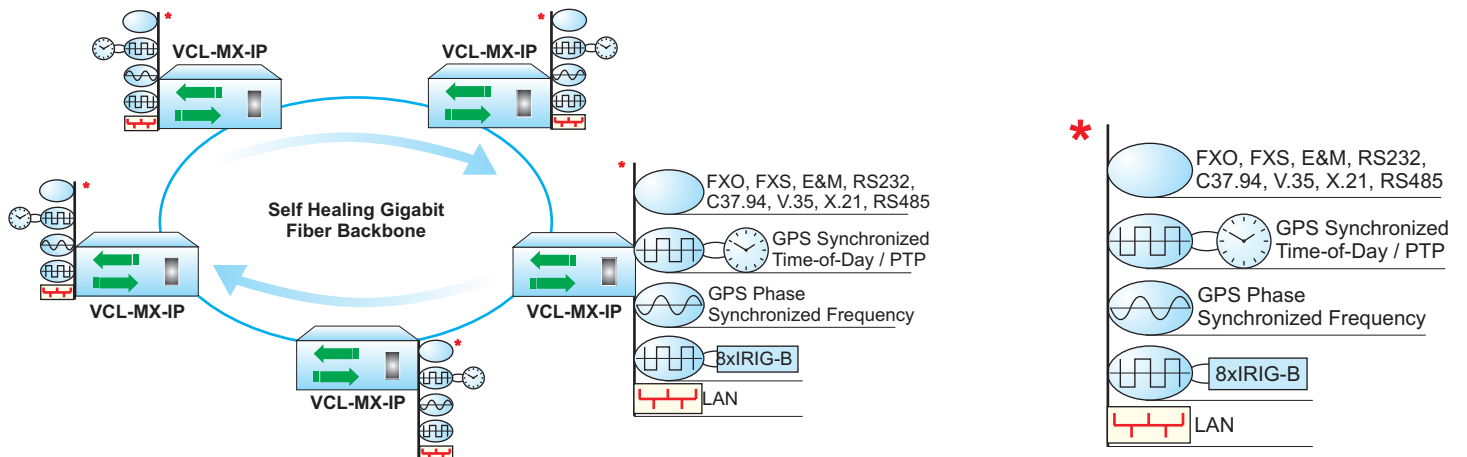

Over a "Hybrid" wireless / Optical Network

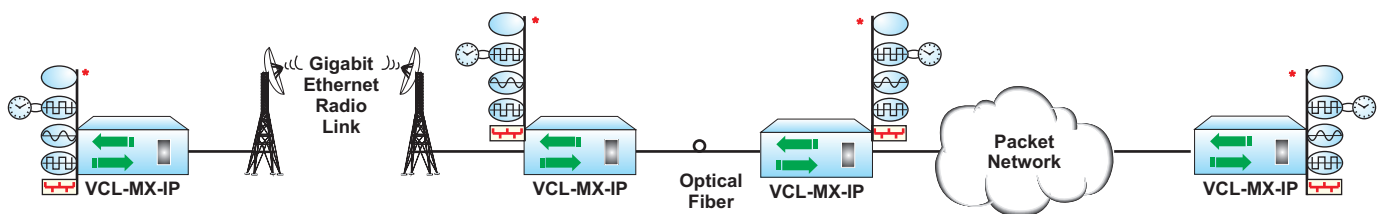

Revision 1.5 – February 12, 2015

U.K.

Valiant Communications (UK) Ltd
1, Acton Hill Mews,
310-328 Uxbridge Road,
London W3 9QN, United Kingdom

E-mail: gb@valiantcom.com

U.S.A.

Valcomm Technologies Inc.
4000 Ponce de Leon, Suite 470
Coral Gables, FL 33146
U.S.A.

E-mail: us@valiantcom.com

INDIA

Valiant Communications Limited
71/1, Shivaji Marg,
New Delhi - 110015,
India

E-mail: mail@valiantcom.com